

XBS SMD MODULAR ROTARY SWITCH

The XBS modular switch disconnecter can be used for switching circuits on or off in households and in numerous fields of industry.

Types:

- SMDK 332 (3x32 A), SMDK 340 (3x40 A),
- SMDK 363 (3x63 A), SMDK 380 (3x80 A),
- SMD 3100 (3x100 A), SMD 3125 (3x125 A)

Connection:

SMD 340: with 16 mm diameter wire

SMD 363: with 16 mm diameter wire

SMD 380: with 50 mm diameter wire

SMD 3100: with 50 mm diameter wire

SMD 3125: with 50 mm diameter wire

Width: 2-3 modules, DIN rail mounted

Can be converted to 4 poles

with auxiliary contacts


SMDK-2 changeover switch 3x63A 1-0-2

SMDK-2 changeover switch 3x80A 1-0-2

SMD-2 changeover switch 3x100A 1-0-2

SMD-2 changeover switch 3x125A 1-0-2

Name	Code
Door interlock handle	
yellow/ red A1	SMD DIHYR
Door interlock shaft	
100 mm S-102+R	SMD DIS100
200 mm S-102+R	SMD DIS200
300 mm S-102+R	SMD DIS300
4th pole	
32-40A	SP 32-40
63A	SP 63
80A	SP-80

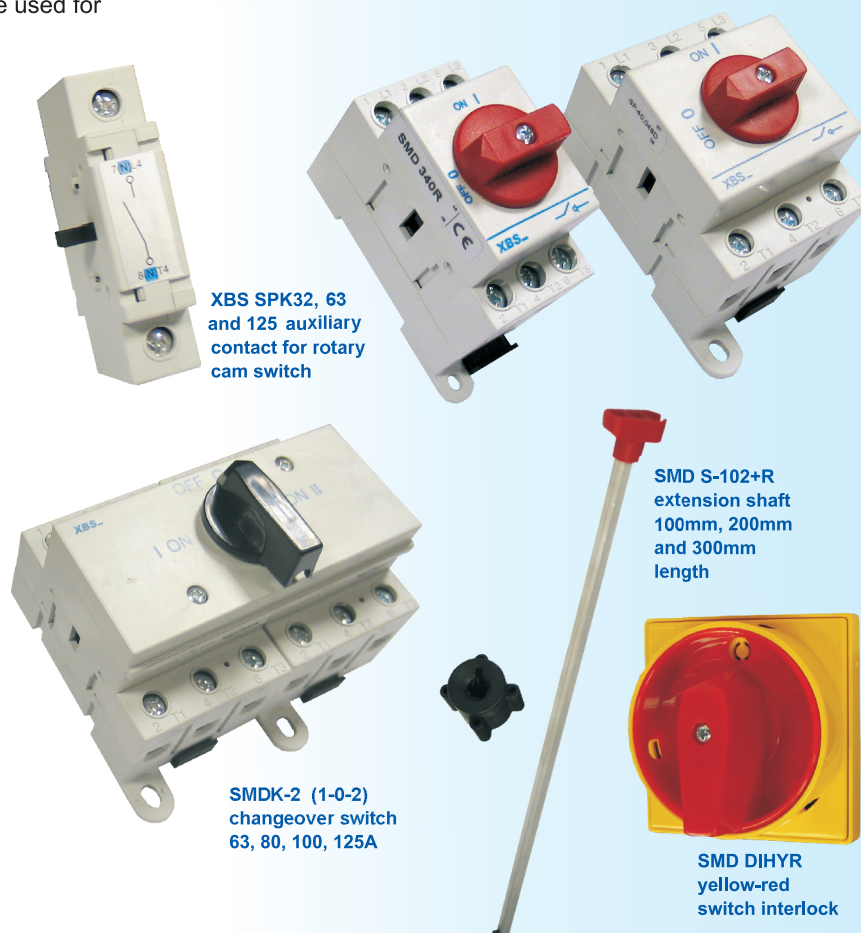

XBS SPK32, 63 and 125 auxiliary contact for rotary cam switch

SMDK-2 (1-0-2) changeover switch 63, 80, 100, 125A

SMD S-102+R extension shaft 100mm, 200mm and 300mm length

SMD DIHYR yellow-red switch interlock

XBS TK LOAD BREAK SWITCH

Number of poles: 3

The load switch head is included in the price of the load switch.

Possibility to order extension shaft.

(switch head colors: red or black)

The switch head is lockable.

Extension shaft length: 300 mm

Rear mounting with 4 screws

In accordance with IEC 60947-3



ACCESSORIES

TKR-R (red) or TKR-B (black)

Operation handle outside the board
(colors: red or black)



Extension shaft (300mm)



Joint sleeve

Type and model	Ue (V)	Ie (A)	Ui (V)	Uimp (kV)	Icu	Icm (kA)
TK-100	400	100	800	8	15 Ie	15
	690	50	800	8	15 Ie	15
TK-125	400	125	800	8	15 Ie	15
	690	63	800	8	15 Ie	15
TK-160	400	160	800	8	15 Ie	15
	690	80	800	8	15 Ie	15
TK-200	400	200	800	8	15 Ie	15
	690	100	800	8	15 Ie	15
TK-250	400	250	800	8	15 Ie	15
	690	125	800	8	15 Ie	15
TK-315	400	315	800	8	12 Ie	25
	690	160	800	8	12 Ie	25
TK-400	400	400	800	8	12 Ie	25
	690	200	800	8	12 Ie	25